


MB-Z/MBY-Z Series

ø32, ø40, ø50
ø63, ø80
ø100, ø125


The Replacement Procedure is on p. 381

Construction

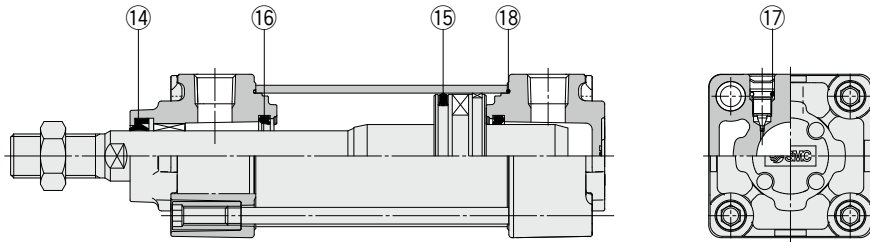

* The figures above show the construction of the MB-Z series.
The numbers correspond with those in the "Construction" of the MB-Z series in the **Web Catalog**.

With rod boot

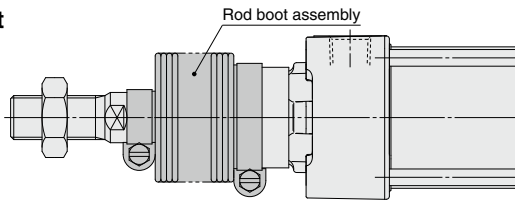

* Replaceable with the rod boot assembly
For details on replacement part numbers, refer to page 245. (MB-Z only)

Seal Kit List

No.	Description	Material	Qty.	Note
14	Rod seal	NBR	1	17 is a non-replaceable part, so it is not included in the seal kit.
15	Piston seal	NBR	1	
16	Cushion seal	Urethane	2	
17	Cushion valve seal	NBR	2	
18	Cylinder tube gasket	NBR	2	

Replacement Parts: Seal Kit

Bore size (mm)	Part no.	Contents
Standard type		
32	MB32Z-PS	Set of nos. 14, 15, 16, 18
40	CA2-40Z-PS	
50	CA2-50Z-PS	
63	CA2-63Z-PS	
80	CA2-80Z-PS	
100	CA2-100Z-PS	
125	MB125-PS	
Smooth cylinder		
32	MBY32Z-PS	Set of nos. 14, 15, 18
40	CA2Y40Z-PS	
50	CA2Y50Z-PS	
63	CA2Y63Z-PS	
80	CA2Y80Z-PS	
100	CA2Y100Z-PS	

* The seal kit for the standard type includes 14, 15, 16, and 18. Order the seal kit based on each bore size.
* The center trunnion type should not be disassembled.
* The seal kit for the standard type includes a grease pack (ø32 to ø50: 10 g, ø63, ø80: 20 g, ø100, ø125: 30 g). The seal kit for the smooth cylinder also includes a grease pack (10 g).
Order with one of the following part numbers when only the grease pack is required.

Standard type
Grease pack part no.: GR-S-010 (10 g)
GR-S-020 (20 g)

Smooth cylinder
Grease pack part no.: GR-L-005 (5 g)
GR-L-010 (10 g)
GR-L-150 (150 g)

Actuators
Rotary Actuators
Air Grippers
Modular F.R.L.
Pressure Control Equipment
Air Preparation Equipment
Industrial Filters
Replacement Procedure
Actuators
Rotary Actuators
Air Grippers
Modular F.R.L.
Pressure Control Equipment
Air Preparation Equipment
Industrial Filters